



DATASHEET CSD 450 EDU

The DeepDrive CSD 450 electric drive unit (EDU) with a novel, dual-rotor, radial-flux electric machine and an integrated SiC-inverter offers best-in-class efficiency at lowest cost.


A two-stage, spur gearbox with coaxial output shaft minimizes space consumption at a very low cost level. Gearbox ratio can be varied in a range from 6.4:1 to 9:1.

Target applications are the main drive unit for compact and mid-sized vehicles and all-wheel-drive options for premium electric vehicles.

KEY FEATURES

- 430 Nm peak motor torque
- Gear ratios from 6.4:1 to 9:1
- up to 3.800 Nm output torque
- up to 2.000 rpm output speed
- 230 kW peak power
- up to 850 V battery supply
- >95 % peak efficiency
- <68 kg weight
- CAN-Interface for torque & speed control
- Flexible vehicle interfaces

All values based on simulation and subject to change.

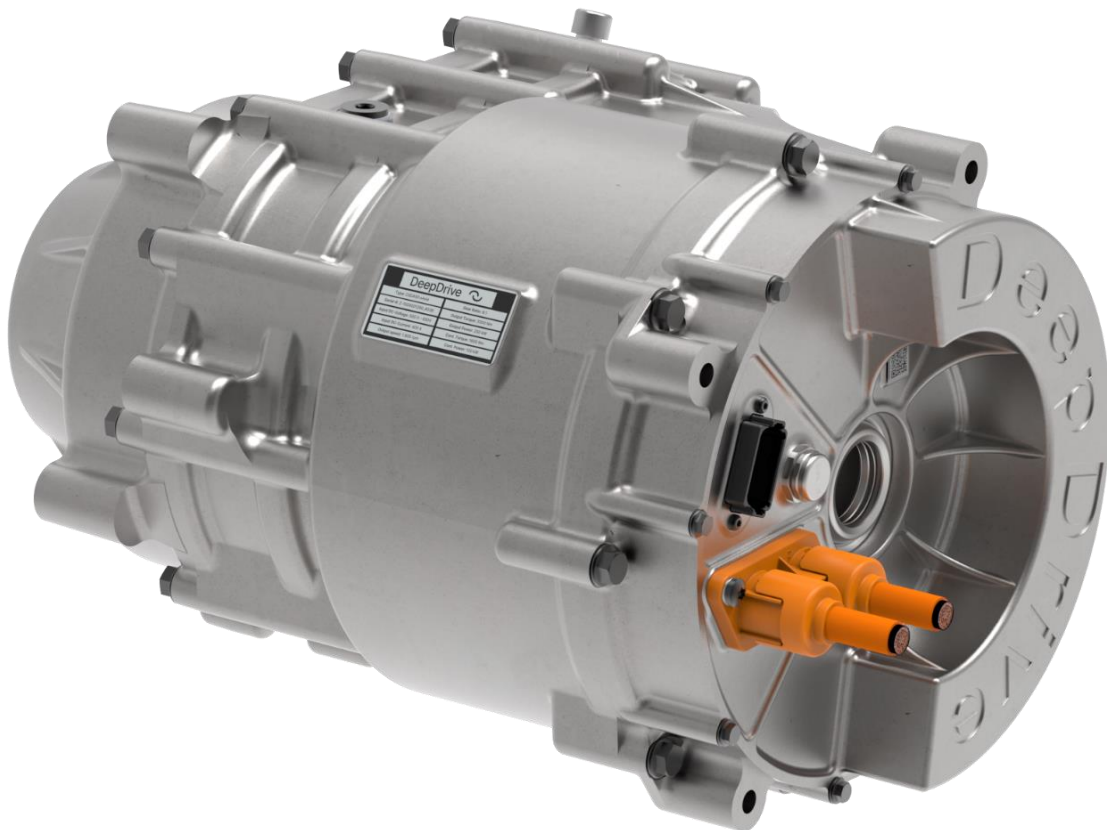



DATASHEET
CSD 450 EDU

PRODUCT DATA



NAME	SYM.	MIN.	TYP	MAX.	UNIT	CONDITIONS / COMMENTS
DC-voltage	U_{dc}	450	650	850	V	lower voltage limit on request
Output torque (30s)	M_{30s}	2,700	3,400	3,800	Nm	gear ratios ¹⁾ : 6.4 8 9
Output torque (S1)	M_{30s}	1,400	1,600	2,000	Nm	gear ratios ¹⁾ : 6.4 8 9
Output power (30s)	P_{30s}	230			kW	$T_{Mag}=60^{\circ}C$, $U_{dc}=650$ V
Output power (S1)	P_{Cont}	145			kW	$T_c=60^{\circ}C$, $Q_c=8$ l/min, $U_{dc}=650$ V
Output speed		1,400	1,600	2,000	1/min	gear ratios ¹⁾ : 9 8 6.4
Motor torque (30s)	M_{30s}	430			Nm	$T_{Mag}=60^{\circ}C$
Motor torque (S1)	M_{Cont}	200			Nm	$T_c=60^{\circ}C$, $Q_c=8$ l/min
DC-current (30s)	$I_{DC,30s}$	400			A	$T_{Mag}=60^{\circ}C$, $U_{dc}=650$ V
DC-current cont.	$I_{DC,cont}$	250			A	$T_c=60^{\circ}C$, $Q_c=8$ l/min, $U_{dc}=650$ V
Motor speed	n_{max}	12,800			1/min	
Coolant temperature	T_c	-40	55	65	$^{\circ}C$	derating may occur above $55^{\circ}C$
Coolant flow rate	Q_c	2	8	12	l/min	derating may occur at <8 l/min
Coolant type	water-glycol 50/50				-	
Pressure drop	Δp	<200			mBar	$Q_c=8$ l/min, $T_c=60^{\circ}C$
Mass excl. bearing	m	<68			kg	dry, no coolant
Length	x	380			mm	max. value, see drawing
Width	y	470			mm	max. value, see drawing
Height	z	270			mm	max. value, see drawing
eDrive efficiency	η_{ED}	97.6			%	$U_{dc}=650$ V, incl. Inverter
EDU efficiency	η_{EDU}	95.3			%	$U_{dc}=650$ V, see Map

¹⁾other options on request



DATASHEET
CSD 450 EDU

EFFICIENCY MAP AND OPERATING LIMITS

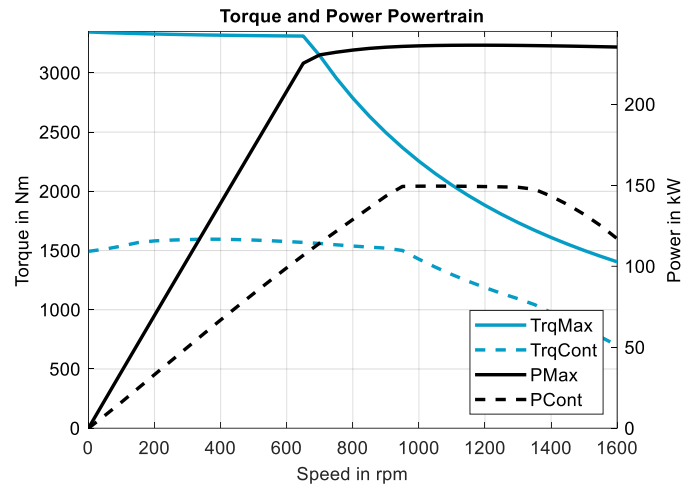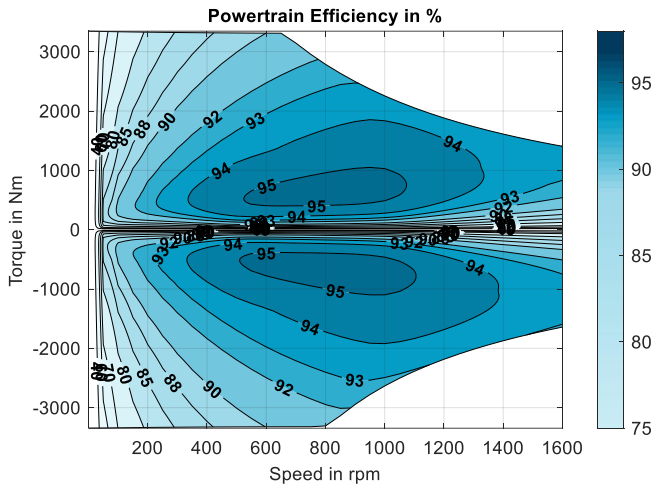

Conditions: $T_{Mag}=60^{\circ}C$, $T_{Cu}=60^{\circ}C$, $T_c=60^{\circ}C$, $U_{dc}=650$ V, Gear ratio=8

DRAWING & CAD ENVELOPE-MODEL

[on request]